

# Dongfeng Cummins Technical Operations



ENGINE MODEL: 4BT3.9-G2  
CURVE & DATASHEET: FR92540

REV 00 15APR2009



**Generator Engine Performance Data**

DONGFENG CUMMINS ENGINE Co.,LTD

Xiangfan, Hubei Province, China  
<http://www.dcec.com.cn>

Basic Engine Model:

**4BT3.9-G2**

**FR92540**

**FR92540 @ 1500 RPM**

Configuration	CPL Code	Revision
D382012GX02	CPL: 3115	2009-4-15


Compression Ratio:	<b>17.3:1</b>	Aspiration:	<b>Turbocharged</b>
Bore:	<b>102 mm</b>	Displacement:	<b>3.9 L</b>
Stroke:	<b>120 mm</b>	No. of Cylinders:	<b>4</b>
Governor Regulation:	<b>≤5%</b>	Fuel System:	<b>BYC A/GAC 24V</b>

All data is based on the engine operating with fuel system, water pump, and 10 in H<sub>2</sub>O (2.488 kPa) inlet air restriction with 5.98 in (152mm) inner diameter, and with 2.01 in Hg (7 kPa) exhaust restriction with 4.02 in (102 mm) inner diameter; not included are alternator, fan, optional equipment and driven components. Coolant flows and heat rejection data based on coolants as 50% ethylene glycol/50% water. All data is subject to change without notice.

Engine Speed RPM	Standby Power		Prime Power		Continuous Power	
	kW	HP	kW	HP	kW	HP
1500	40	54	36	48	TBD	TBD

**Engine Performance Data @ 1500 RPM**

OUTPUT POWER			FUEL CONSUMPTION	
%	kW	HP	g/kW.h	L/h
<b>STANDBY POWER</b>				
100	40	54	212	10.3
<b>PRIME POWER</b>				
100	36	48	214	9.3
75	27	36	223	7.3
50	18	24	244	5.3
25	9	12	312	3.4
<b>CONTINUOUS POWER</b>				
TBD	TBD	TBD	TBD	TBD

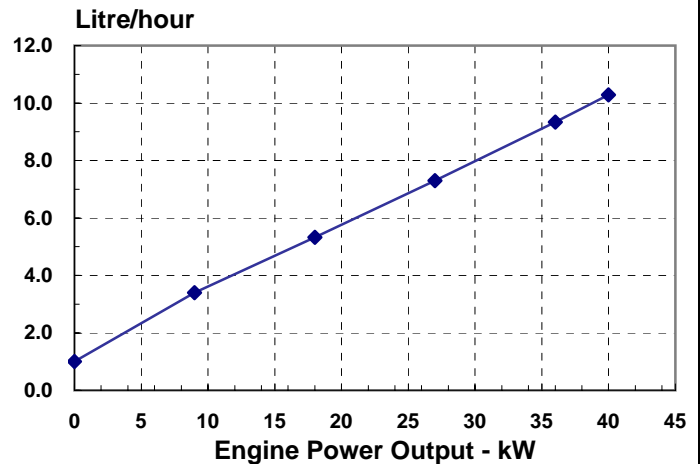

**Engine Performance Data @ 1800 RPM**

**Not Available at 1800 RPM**

**Not Available at 1800 RPM**

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with GB/T18297 conditions of 100kPa (29.61 in. Hg) barometric pressure [80 m (263 ft.) altitude], 25°C (77°F) inlet air temperature, and 1 kPa (0.30 in. Hg) water vapor pressure with No.0 diesel fuel. The engine may be operated without changing the fuel setting up to 2200 m (7218ft.) altitude.

**GENERAL ENGINE DATA**

Approximate Engine Weight (wet).....	-kg	321
Mass Moment of Inertia of Rotating Components (No Flywheel).....	-kg·m <sup>2</sup>	0.143
Center of Gravity from Rear Face of Block.....	-mm	373
Center of Gravity above Crankshaft Centerline.....	-mm	163
Crankshaft Thrust Bearing Load Limit		
—Maximum Intermittent.....	-N	3425
—Maximum Continuous.....	-N	1112

**ENGINE MOUNTING**

Maximum (Static) Bending Moment at Front Support Mounting Surface.....	-N.m	435
Maximum (Static) Bending Moment at Side Pad Mounting Surface.....	-N.m	TBD
Maximum (Static) Bending Moment at Rear Face of Block.....	-N.m	1356
Moment of Inertia of Complete Engine		
— Roll Axis.....	-kg·m <sup>2</sup>	16.5
— Pitch Axis.....	-kg·m <sup>2</sup>	41.1
— Yaw Axis.....	-kg·m <sup>2</sup>	35.4

**EXHAUST SYSTEM**

Maximum Back Pressure.....	-kPa	10
Exhaust Pipe Size Normally Acceptable.....	-mm	75
Maximum Static Supported Weight at the Turbocharger Outlet Flange.....	-N.m	13.5
Exhaust Manifold Insulation Acceptable.....	-Yes/No	No
Turbocharger Insulation Acceptable.....	-Yes/No	No

**AIR INTAKE SYSTEM**

Maximum Intake Air Restriction with Heavy Duty Air Cleaner		
— Dirty Element.....	-kPa	6
— Clean Element.....	-kPa	4
Minimum Dirt Holding Capacity with Heavy Duty Air Cleaner.....	-g/cfm	53
Maximum Temperature Rise from Ambient to the Inlet of the Turbocharger.....	-°C	17
Recommended intake piping size (inner diameter).....	-mm	76

**LUBRICATION SYSTEM**

Minimum Engine Oil Pressure for Engine Protection Devices:		
—Idle Speed.....	-kPa	207
—Governed Speed.....	-kPa	345
Maximum Oil Temperature.....	-°C	121
Oil Capacity with OP 9006 Oil Pan : High - Low.....	-litre	9.5 - 8.5
Minimum Required Lube System Capacity - Sump plus Filters.....	-litre	10.9
Angularity of Standard Oil Pan: (Values stated are for intermittent operation only):		
— Front Down.....	- °	40
— Front Up.....	- °	40
— Side to Side.....	- °	40

**FUEL SYSTEM**

Type Injection System.....		BYC A Direct Injection
Maximum Restriction at Lift Pump.....	-mmHg	102
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head)		
.....	-mmHg	508
Total Drain Flow (constant for all loads).....	-litre/hr	30

**COOLING SYSTEM**

Coolant Capacity - Engine Only.....	-litre	7.2
Maximum Coolant Friction Head External to Engine... -1800 rpm.....	-kPa	35
-1500 rpm.....	-kPa	28
Maximum Static Head of Coolant Above Engine Crank Centerline.....	-m	14
Standard Thermostat (Modulating) Range.....	-°C	82 - 95
Minimum Pressure Cap.....	-kPa	69
Maximum Top Tank Temperature for Standby / Prime Power.....	-°C	104 / 100

**ELECTRICAL SYSTEM**

Cranking Motor (Heavy Duty, Positive Engagement).....	-volt	12V	24V
Battery Charging System, Negative Ground.....	-ampere	63	40
Maximum Allowable Resistance of Cranking Circuit.....	-ohm	0.00075	0.002
Minimum Recommended Battery Capacity			
• Cold Soak @ 10 °F (-12 °C) and Above.....	-0°F CCA	625	(312)

Fuel Rating Option used for these Data: **FR92540**

Governed Engine Speed.....	-rpm
Engine Idle Speed.....	-rpm
Gross Engine Power Output.....	-kW
Piston Speed.....	-m/s
Friction Horsepower.....	-kW
Engine Water Flow to Engine:.....	-litre/sec.
Intake Air Flow.....	-litre/sec.
Exhaust Gas Temperature.....	-°C
Exhaust Gas Flow.....	-litre/sec.
Radiated Heat to Ambient.....	-kW
Heat Rejection to Coolant.....	-kW
Heat Rejection to Exhaust.....	-kW

STANDBY POWER		PRIME POWER	
1800	1500	1800	1500
<b>N/A</b>	950 - 1050	<b>N/A</b>	950 - 1050
	40		36
	6		6
	8.2		8.2
	2.2		2.2
	45		44
	487		463
	108		101
	TBD		TBD
	29		25.9
TBD	TBD		

ALL DATA CERTIFIED WITHIN 5%

TBD = To Be Decided

N/A = Not Applicable

N.A. = Not Available

All data is subject to change without notice, sorry for inform.

Dongfeng Cummins Engine Co., Ltd.